



COMPANY PROFILE



Company Profile

www.khairanisinerghusantara.com



TABLE OF CONTENT



- About Our Company
- Our Product
- Manufacturing Tools & Equipment's
- Engineering Center Facilities



Company Profile

www.khairanisinerginusantara.com



About Our Company



A Brief Story About The Company

PT Khairani Sinergi Nusantara adalah mitra terpercaya dalam *Industri Pemeliharaan Energi* yang mengkhususkan diri pada bidang **Inspeksi, Perawatan, dan Perbaikan Boiler PLTU**, sekaligus bertindak sebagai penyedia Sparepart Berkualitas bagi para pengguna (user). Melalui sinergi antara teknisi yang berpengalaman dan ketersediaan suku cadang yang lengkap, kami siap memastikan keberlangsungan operasional pembangkit listrik Anda berjalan dengan Aman, Efisien, dan Berkelanjutan.



Vision

Menjadi perusahaan penyedia jasa pemeliharaan dan inspeksi boiler PLTU yang unggul, terdepan, dan andal, yang mampu memberikan ketenangan bagi mitra bisnis melalui penerapan standar keselamatan kerja tertinggi demi mewujudkan operasional yang aman, produktif, serta bebas dari kecelakaan kerja (zero accident).

Mission

1

Memberikan jasa *Inspeksi, Maintenance Repair dan Retubing* pada Boiler dengan standar dan sesuai regulasi kerja.

2

Mengutamakan keselamatan kerja zero accident melalui prosedur ***LOTO, Confined Space, Hot work*** yang ketat.

3

Menggunakan SDM yang kompeten, berintegritas dan berjiwa sinergi.

Board of Directors



SONY DWI DARMAWAN
President Directors



SUDAHNAL
Commissioner




ZAINI YULIANSYAH, SH
Procurement Manager



NOVI YULIANI, S. KOM
Finance Manager

The Organization Structure

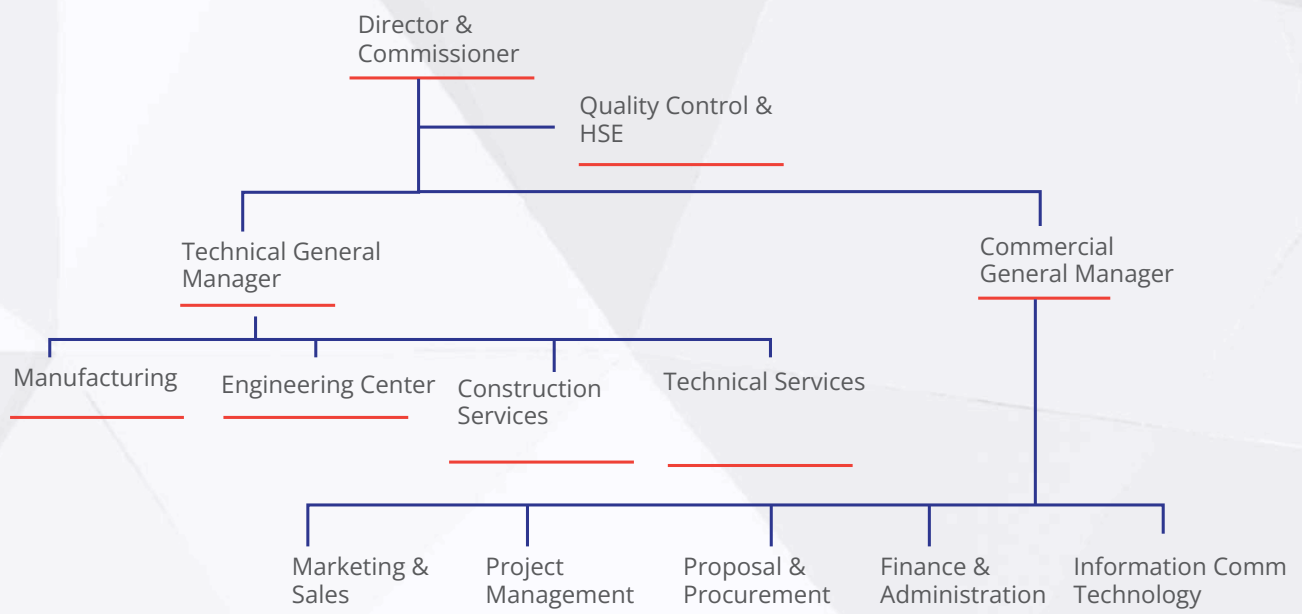




Name Company : PT KHAIRANI SINERGI NUSANTARA
Address : Wiyung Indah BLOK CX/5
60228, Surabaya, Jawa Timur
Phone : +62 881 0261 83790
Email : khairanisinerginusantara@gmail.com
Website : khairanisinerginusantara.com

Legality

CORPORATE INFORMATION

KSN Client



PLN



PERTAMINA



Occupational Safety and Health



Work Activities




BOILER PRODUCTION AND SERVICES


CONTENTS

- Flow of Processes Upper and Mud (Lower) Drum
- Flow of Processes Side Wall Panel
- Flow of Processes Boiler (Generating) Bank
- Flow of Processes Superheater Elements
- Flow of Processes Headers
- Flow of Processes Riser Tubes
- Flow of Processes Saturated Steam Pipes


Flow of Processes Upper and Mud (Lower) Drum

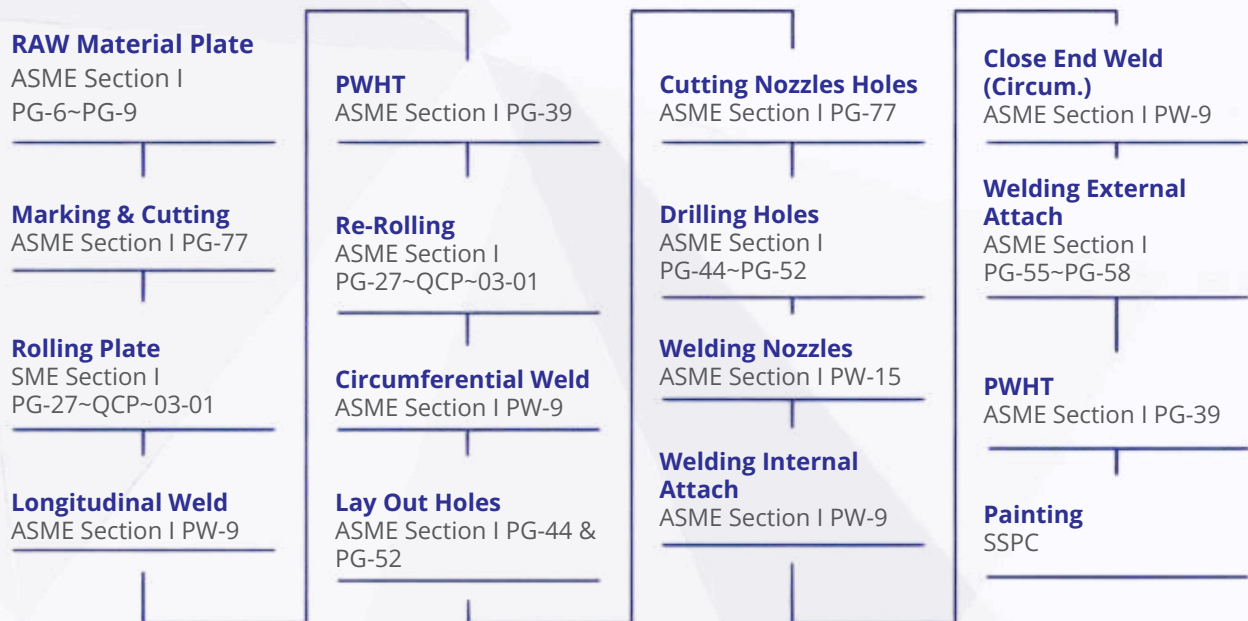

Flow Of Processes Side Wall Panel

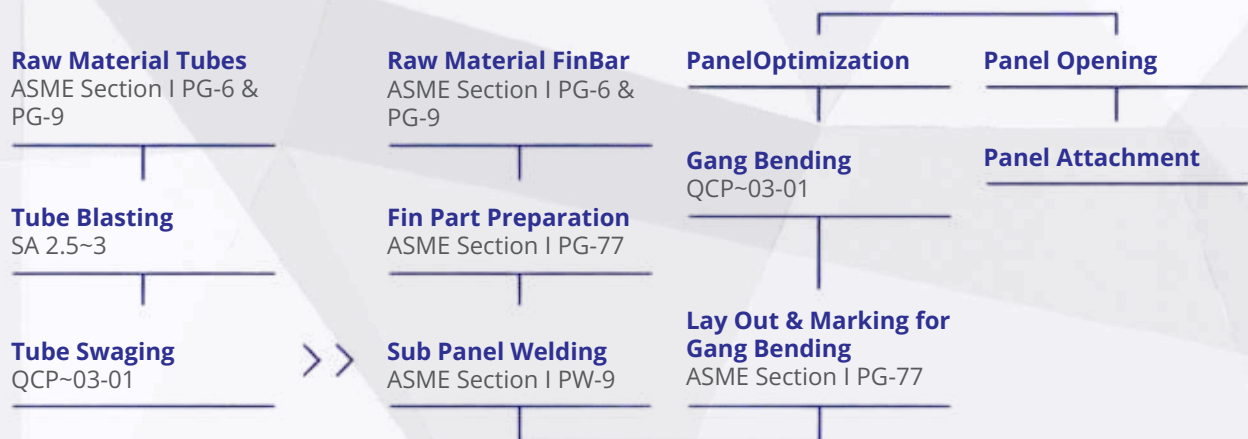

Flow of Processes Boiler (Generating) Bank

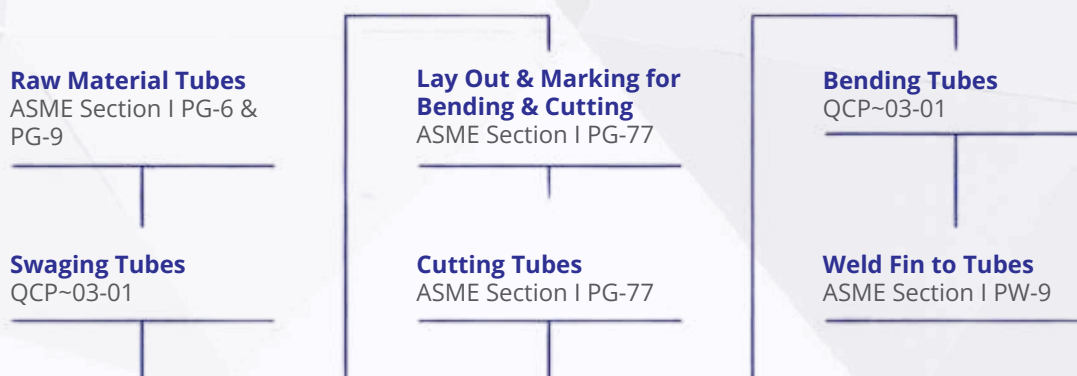



Flow Processes Superheater Elements

Raw Material Tubes

ASME Section I PG-6 & PG-9

Lay Out for Cutting & Bending

ASME Section I PG-77

Cutting Tubes

ASME Section I PG-77

Tubes Bending

QCP~03-01

Tube Scarfing

Element Optimization and Welding

Sponge Test

Hydrotest

ASME Section I PG-99

Flow of Processes Header

Raw Material Pipe

ASME Section I PG-6 & PG-9

Lay Out & Marking for Cutting & Drilling

ASME Section I PG-77

Cutting & End Scarfing

ASME Section I PG-77

Drilling

ASME Section I PG-44 & PG-52

Welding End Plate

ASME Section I PW-9

Welding End Nozzle

ASME Section I PW-15

Welding End Stub / Nipple

ASME Section I PG-55~PG-58

Attachment Weld

ASME Section I PG-55~PG-58

PWHT

ASME Section I PG-39

Flow of Processes Riser Tube

Raw Material Tubes

ASME Section I PG-6~PG-9

Lay Out & Marking for Cutting & Bending

ASME Section I PG-77

Cutting

ASME Section I PG-77

Bending

QCP~03-01

Scarfing

ASME Section I PG-77

Flow of Processes Saturated Steam Pipes

Raw Material Pipes
ASME Section I PG-6
& PG-9



**Lay Out & Marking for
Cutting & Drilling**
ASME Section I PG-77



Cutting
ASME Section I PG-77



**End
Scarfig**



Flow of Processes Package Boiler Assembly



Setup & Install

- »»» Wall
- »»» Riser Tube
- »»» Saturated
- »»» Steam



SEE
ASSEMBLING
PROCEDURE

Testing Of Processes Package Boiler Assembly

➔ Non Destructive Testing After Assembled

➔ Roll/Expanding

➔ Setup & Install Internal Drum

➔ Hydrotest

➔ Air Leak Test

SERVICES



**MAINTENANCE
& REPAIR
CFB BOILER & BOP**

Field Maintenance Team Boiler & Balance Of Plant



In-house Maintenance Scope


Client Maintenance Scope

Corrective Maintenance
Preventive Maintenance
Predictive Maintenance

- 01 Daily/Weekly/Monthly/Quartely Inspection
- 02 Repair with Work Order
- 03 Prepare for Overhaul or Major outage & supervise

Vendor/contractor Scope

- 01 Major Overhaul & Urgent repair work (unit shutdown)
- 02 Major Modification for improvement
- 03 Assist Maintenance team for Failure diagnosis with Vendor diagnostic system
- 04 Other activities based on requested by client Maintenance Department
 - Assist. Commissioning
 - Emergency Support
 - Provide ITP and procedures
 - Provide Tool and site facilities
 - Report & Recommendation

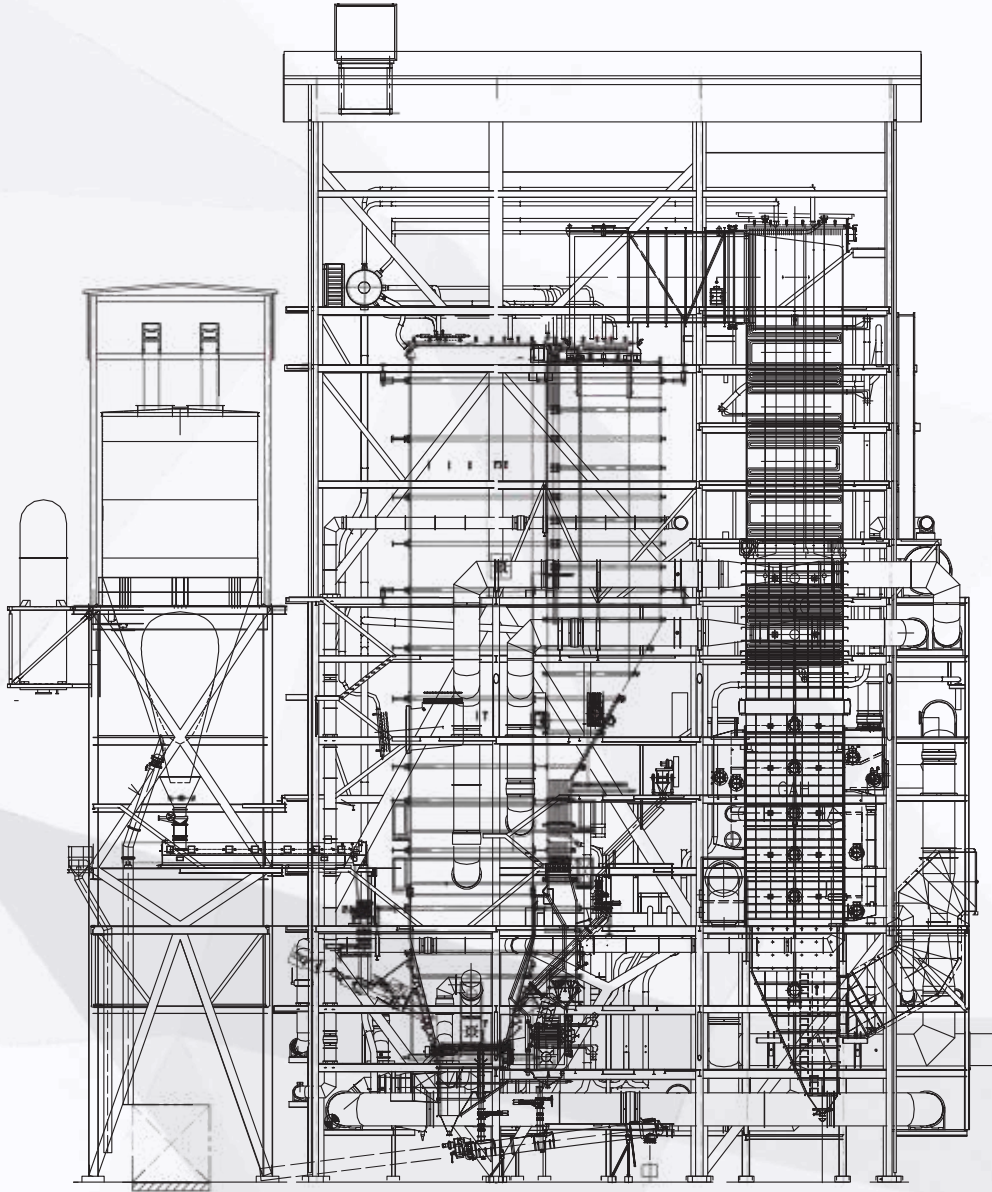

A typical period of maintenance work

Class "A" (Major Overhaul) :
40 days

(including De-synchronizing and synchronizing)

Class "P" : 20 days

(including De-synchronizing and synchronizing)

Class "B" : 35 days

(including De-synchronizing and synchronizing)

EPC Warranty: 18 Months

MAINTENANCE & REPAIR WORK



BOILER SYSTEM



BOTTOM ASH SYSTEM



BOILER SYSTEM



BOTTOM ASH SYSTEM

MAINTENANCE & REPAIR WORK



AIR DRAFT SYSTEM

